

Technical data sheet

ADLER Abbeizer Spray

95126


Universal paint remover for **DIY and professional use**

PRODUCT DESCRIPTION

General

Highly effective paint remover spray with gel structure also for vertical surfaces. Particularly suitable for removing old, water-based window coating systems. Due to the long open time also removes thick coats of paint in one process and is also effective with many 2-component systems (carry out a preliminary trial). The product is formulated without the addition of chlorinated hydrocarbons.


Application areas

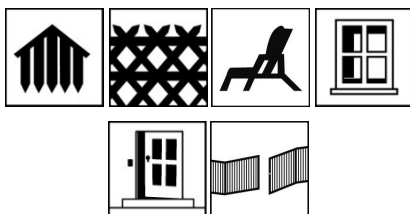

- For coating all objects with a small area such as wooden windows, front doors, furniture, handrails, frames, fittings etc.

PROCESSING

Instructions for use



- Please shake the product before use.
- Do not apply if temperatures are below 5 °C or higher than 30 °C and/or relative humidity > 80%.
- It is recommended to check the material compatibility on test areas.
- Sealants and other parts sensitive to solvents must be taped off.
- Non-ferrous metals can be discoloured by ADLER Abbeizer-Spray.
- Reaction time approx. 10 minutes per coat.
- The reaction time depends on the type, thickness, working temperature and age of the coat. The optimal reaction time is best determined on a test area.
- Highly absorbent substrates reduce the reaction time.
- Avoid direct sunlight (very quick drying).
- Remove old swollen coating with ADLER Lackziehklingen 9591001 (paint removal blades) or scrapers.
- Rinse the stripped areas thoroughly with water in order to prevent the subsequent coats of paint from being discoloured.
- Remove paint splashes immediately with water.

Application technique



Application method	Spraying
Yield per application (m ² /l)	2 - 3

The product is ready to use.

Spray the product thoroughly.

The shape, the properties and moisture of the substrate affect the consumption/yield. Accurate values for consumption must be obtained by applying trial coats in advance.

ORDERING INFORMATION

Size of trading unit

400 ml (capacity is sufficient for approx. 0.8 m²)

Color shades/degree of gloss


Farblos 95126

Supplementary products

ADLER Lackziehklingen 9591001

FURTHER DETAILS

Durability/storage



At least 1 year in the original sealed containers.

Make sure the product is protected against moisture, direct sunlight, frost and high temperatures (above 30 °C).

Safety-related information



Further information on the subject of safety during transport, storage and handling as well as disposal can be found in the relevant safety data sheet. The current version can be accessed on the Internet at www.adler-lacke.com.

Inhaling paint aerosols whilst spraying must generally be avoided; this is ensured by correctly using a respiratory mask (combination filter A2/P2 – EN 141/EN 143).

The removed paint sludge must be treated as hazardous waste and disposed of in accordance with legal regulations.